

4-2100 H

FISH & RICHARDSON P.C.

4350 La Jolla Village Drive
Suite 500
San Diego, California 92122

Telephone
858 678-5070

Facsimile
858 678-5099

Web Site
www.fr.com

PTO
09/551889
04/19/00

April 19, 2000

Attorney Docket No.: 07452-046001

Box Patent Application
Commissioner of Patents
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: RICHARD G.C. WILLIAMS

Title: METHOD OF DIFFERENTIAL ENCODING A PRECODED
MULTIPLE MODULUS ENCODER

Enclosed are the following papers, including those required to receive a filing date
under 37 CFR 1.53(b):

	<u>Pages</u>
Specification	12
Claims	3
Abstract	1
Declaration	[To be Filed at a Later Date]
Drawing(s)	2

Enclosures:
— Postcard.

Basic filing fee	\$690
Total claims in excess of 20 times \$18	\$0
Independent claims in excess of 3 times \$78	\$0
Fee for multiple dependent claims	\$0
Total filing fee:	\$690

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No EL584778590US

I hereby certify under 37 CFR §1.10 that this correspondence is being
deposited with the United States Postal Service as Express Mail Post
Office to Addressee with sufficient postage on the date indicated below
and is addressed to the Commissioner of Patents, Washington,
D.C. 20231.

April 19, 2000
Date of Deposit
Signature M. E. Augustine
Mike Augustine
Typed or Printed Name of Person Signing Certificate

JCS20 U.S. PTO
NA/10/NN
Frederick P. Fish
1855-1930
W.K. Richardson
1859-1951

FR
BOSTON
DELAWARE
NEW YORK
SAN DIEGO
SILICON VALLEY
TWIN CITIES
WASHINGTON, DC

FISH & RICHARDSON P.C.

Commissioner of Patents
April 19, 2000
Page 2

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (858) 678-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

JAMES T. HAGLER
Fish & Richardson P.C.
4350 La Jolla Village Drive, Suite 500
San Diego, CA 92122

Respectfully submitted,

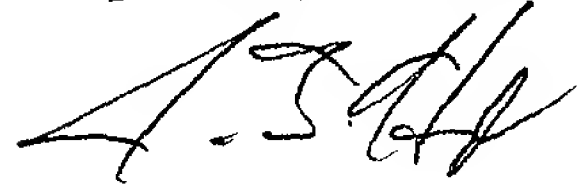

James T. Hagler
Reg. No. 40,631
Enclosures
JTH/jjb
10030072 doc

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: METHOD OF DIFFERENTIAL ENCODING A PRECODED
MULTIPLE MODULUS ENCODER

APPLICANT: RICHARD G.C. WILLIAMS

CERTIFICATE OF MAILING BY EXPRESS MAIL


Express Mail Label No. EL584778590US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner of Patents, Washington, D.C. 20231.

April 19, 2000

Date of Deposit

Signature

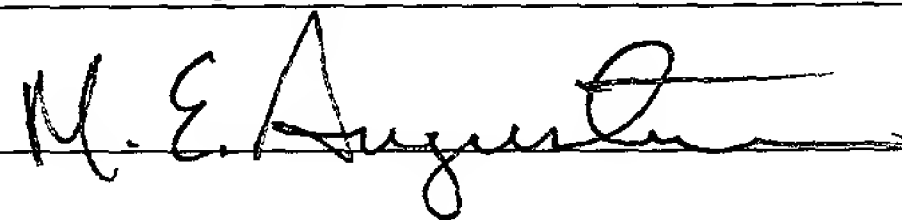

Mike Augustine

Typed or Printed Name of Person Signing Certificate

METHOD OF DIFFERENTIAL ENCODING A PRECODED MULTIPLE MODULUS ENCODER

TECHNICAL FIELD

This invention relates to differential encoding data bits, and more particularly to ensuring phase shift immunity in modems using such differential encoding.

BACKGROUND

5 The word MODEM is an acronym for MODulator-
DEModulator. Modems accept digital data typically supplied by
the local PC, and convert it to a modulated analog waveform
that can be transmitted over a normal analog phone line.
10 Conversely, modems also accept a modulated analog wave from
the telephone line, convert it to a digital form, and pass it
on to a local computer. During modem communication, it is
possible that the channel the modem is communicating over is
inverted, causing a negative voltage to be perceived as
15 positive and a positive voltage to be perceived as negative.
In a system employing 1-dimensional modulation techniques,
such as PAM, this channel inversion is equivalent to a 180
degree phase shift of the constellation used for transmission.
Similarly, if a 2-dimensional modulation scheme, such as QAM,
20 is used, the channel inversion can be equivalent to a 90
degree phase shift of the constellation used for transmission.

Since the constellations used normally have rotational symmetry, if this situation is not known or corrected for, the modem may process the data erroneously.

The emerging V.92 standard uses PAM modulation upstream by combining multiple modulus conversion with precoding techniques. This leads to a problem with ensuring 180 degree phase shift immunity. Immunity to phase shifts that are otherwise undetectable by a modem have been included in all recent modem standards. All previous schemes have operated on a symbol by symbol basis. For a modem operating under the emerging V.92 standard, attempts to ensure phase invariance have been extremely complex. What is needed is a simple solution to ensuring 180 degree phase shift immunity in modems operating under the V.92 standard.

SUMMARY

The present invention provides a simple solution to ensuring phase invariance in V.92 modems. Immunity to channel inversions is provided by a differential encoding algorithm combined with the precoding and modulus conversion system already defined for a V.92 transmitter. A frame of constellations is attributed a sign and the frame and the sign are differentially encoded. The frame and the sign are

differentially decoded after the multiple modulus decoder,
ensuring phase shift immunity.

One aspect of the present invention is a method of
compensating for phase shifts comprising determining the sign
to a frame and differentially encoding the sign of the frame.
The method further comprises differentially encoding the frame
and receiving the channel output. The sign of the output is
determined, and the output is then differentially decoded.

Another aspect of the invention is a method of
compensating for a phase shift in a modem comprising
attributing a sign to a frame of a constellation and
differentially encoding the frame and the sign. After
transmission, the frame and the sign are differentially
decoded.

DESCRIPTION OF DRAWINGS

These and other features and advantages of the
invention will become more apparent upon reading the following
detailed description and upon reference to the accompanying
drawings.

Figure 1 illustrates a transmitter used according to
the V.92 standard in accordance with the present invention.

Figure 2 is a flowchart showing the differential
encoding process according to the present invention.

DETAILED DESCRIPTION

Figure 1 illustrates a transmitter 100 used according to the V.92 standard in accordance with the present invention. The transmitter 100 includes a modulus encoder 105, a precoder 110, a prefilter 115, a convolutional encoder 120, and an inverse map 125. The modulus encoder 105 is a standard multiple modulus encoder. The modulus encoder 105 receives and encodes a block of bits $b_0:b_{k-1}$. The block of bits $b_0:b_{k-1}$ is represented as an integer R_0 . The output signal is a set of numbers $K_0:K_{11}$ derived from R_0 as the multiple modulus representation of R_0 . This output is then mapped into equivalence classes in order to minimize the power coming out of the precoder. The equivalence classes are related to each other in a simple manner as in classical Tomlinson precoding. Thus, the expanded constellations have points labeled in blocks from 0 to M_{i-1} , where M_i is the modulus for the i th constellation.

The precoder 110 receives the output signal and after precoding provides the signals $x(n)$ and $y(n)$. The signal $x(n)$ is provided to the prefilter 115. The signal $y(n)$ is provided to the inverse map 125. Therefore, a technique to correct for the phase shift is required. The inverse map 125 provides the mapped outputs of $Y1:Y4$ to the convolutional encoder 120. The convolutional encoder 120 then provides the

signal Y0 to the precoder 110 in a feedback loop. If the channel voltage of the transmitter 100 is inverted, the signal $v(n)$ becomes $-v(n)$. This causes the input to the modulus decoder to be M_i-1-K_i instead of K_i .

5 The modulus encoder 105 takes in K bits as an integer R_0 which is converted into 12 digits K_i . As stated above, due to the equivalence class mapping, a symbol R_0 passing through the modulus encoder 105, precoder 110, prefilter 115, convolutional encoder 120, inverted channel and convolutional decoder will emerge as $N-1-R_0$. This will cause errors in the output of the modulus decoder and these errors are undetectable by the modem.

To correct for the phase shift, the present invention includes a simple sign differential encoder.

15 Differentially encoding the K bits at the input of the modulus encoder 105 provides the following:

Differential encoder	$D(n) = [R_0 + D(n-1)]_{\text{mod}N};$
Differential decoder	$[D(n) - D(n-1)]_{\text{mod}N} = R_0;$
Differential encoder	$D(n) = [R_0 + D(n-1)]_{\text{mod}N};$
20 Channel adds a phase shift	$D'(n) = N-1-D(n);$
Differential decoder	$[D'(n) - D'(n-1)]_{\text{mod}N} = N-R_0.$

where R_0 is the frame value and N is the product of the moduli. As shown by the above equations, without a channel inversion, R_0 is returned. However, with a channel inversion,

$N - R_0$ is returned. To correct for the channel inversion, a sign differential encoder may be used outside this operation. For example, a sign $s(n)$ of 1 can be attributed to any frame whose value is $> N/2$ and a sign $s(n)$ of 0 can be attributed to all others. After assigning a sign $s(n)$, the sign $s(n)$ may be differentially encoded as $d(n) = s(n) \oplus d(n-1)$, where \oplus is modulo 2 addition. The differentially encoded sign is applied to the frame's value and this is entered into the differential encoder described above. By differentially encoding the sign $s(n)$, the input and output of the transmitter 100 are now invariant to 180 degree phase shifts. One way to achieve the differential encoding of the multiple modulus converted frames is to differentially encode the input. Thus, $D(n) = R_0 + D(n-1)$ can be performed on the input b_0 to b_{K-1} as a modulo N addition before the multiple modulus encoder. Similarly, the differential decoding is carried out after the multiple modulus decoder.

The process 200 of correcting for a phase shift is shown in Figure 2. The process begins at a start state 205. Proceeding to state 210, the process 200 determines the sign of the frame value. One technique to determine the sign of the frame is using the following formula:

$$s(n) = 0 \text{ if } R_0 \leq N/2, \quad s(n) = 1 \text{ if } R_0 > N/2.$$

After determining the sign, the process 200 proceeds to state 210. In state 210, the process 200 differentially encodes the sign of the frame. The sign may be differentially encoded using the formula:

$$d(n) = [s(n) + d(n-1)]_{\text{mod}2}.$$

The process 200 then proceeds to state 220. In state 220, the process 200 differentially encodes the frame. The frame may be differentially encoded using techniques known to one of skill in the art. For example, the frame may be differentially encoded using the formula:

$$D(n) = [D(n-1) + N + (-1)^{d(n-1)}R_0]_{\text{mod}N}.$$

Proceeding to state 225, the process 200 receives the channel output. Based on the above formulas, the channel output is defined by:

$$R(n) = [D(n) + N - D(n-1)]_{\text{mod}N}.$$

Proceeding to state 230, the process 200 determines the sign of the output. The sign of the output is 0 if the channel output is equal to or less than half the product of the moduli and 1 if the channel output is more than half the product of the moduli. This relationship can be stated as follows:

$$r(n) = 0 \text{ if } R(n) \leq N/2,$$

$$r(n) = 1 \text{ if } R(n) > N/2.$$

Proceeding to state 235, the process 200 differentially decodes the output. The output may be differentially decoded using the following formula:

$$R_0 = [N + (-1)^{r(n-1)} R(n)]_{\text{mod} N}.$$

5 After the output is differentially decoded, the process 200 is invariant to 180 degree phase shifts. Thus, the process 200 concludes in end state 240.

An example of the process 200 will now be provided. The example is for a 3 symbol multiple modulus encoder with moduli of 7, 3 and 10. The product of these moduli is 210, so 10 7 bits can be mapped in each frame. Let the inputs, in decimal, be 86, 45, 112, and 103.

First, the sign stream is determined according to state 210. One-half the product of the moduli is (210/2), or 105. Thus, the inputs less than or equal to 105 are given a sign of 0 and those greater than 105 are given a sign of 1. 15 This creates an original sign stream is 0, 0, 1, 0.

After determining the original sign stream, the sign stream is differentially encoded. The differentially encoded sign stream is 0, 0, 1, 1. Applying this to the inputs we get 20 new inputs to the modulus converter of 86, 45, 112, 107 (-103 + 210). This new input is then differentially encoded, resulting in a differentially encoded stream is of 86, 131, 33

(131 + 112 - 210), 140. This stream translates into symbols of {2, 2, 6}, {4, 1, 1}, {1, 0, 3}, {4, 2, 0}.

If the channel does not have phase inversion, the symbols 86, 131, 33, 140 arrive which are differentially decoded into 86, 45, 112, 107. The sign pattern 0, 0, 1, 1 is differentially decoded into 0, 0, 1, 0. The differentially decoded sign pattern is then applied to the outputs of the multiple modulus decoder differential decoder, resulting in the correct final stream of 86, 45, 112, 103 (-107 + 210).

If the channel is subject to phase inversion, the symbols arrive as {4 (7-1-2), 0 (3-1-2), 3 (10-1-6)}, {2, 1, 8}, {5, 2, 6}, {2, 0, 9}. These symbols decode to 123, 78, 176, 69. These symbols are differentially decoded to produce 124 (123 - 209 (an inverted 0) + 210), 165 (78 - 123 + 210), 98, 103. The sign pattern of the decoded symbols is 1, 1, 0, 0, which differentially decodes to 0, 0, 1, 0. Applying this to the multiple modulus decoder differential decoder gives the values 86 (-124 + 210), 45, 112, 103.

Numerous variations and modifications of the invention will become readily apparent to those skilled in the art. Accordingly, the invention may be embodied in other specific forms without departing from its spirit or essential characteristics.

WHAT IS CLAIMED IS:

1 1. A method of compensating for channel inversions
2 comprising:

3 determining the sign of a frame;

4 differentially encoding the sign of the frame;

5 differentially encoding the frame;

6 receiving the channel output;

7 determining the sign of the output; and

8 differentially decoding the output.

9 2. The method of Claim 1, wherein the sign is set to
10 zero if $R_0 \leq N/2$ and the sign is set to one if $R_0 > N/2$, where
11 R_0 is the frame value and N is the product of the moduli.

12 3. The method of Claim 1, wherein the sign is set to
13 zero if $R_0 < N/2$ and the sign is set to one if $R_0 \geq N/2$, where
14 R_0 is the frame value and N is the product of the moduli.

15 4. The method of Claim 1, wherein the sign is
16 differentially encoded using the equation:

17
$$d(n) = [s(n) + d(n-1)]_{\text{mod}2}.$$

1 5. The method of Claim 1, wherein the frame value is
2 differentially encoded using the equation:

$$D(n) = [D(n-1) + N + (-1)^{d(n-1)} R_0]_{\text{mod} N}.$$

1 6. The method of Claim 1, wherein the output is
2 differentially decoded using the equation:

$$R_0 = [N + (-1)^{r(n-1)} R(n)]_{\text{mod} N}.$$

3 7. The method of Claim 1, further comprising
4 translating the differentially encoded frame into symbols.

5 8. The method of Claim 1, wherein the sign of the frame
6 and the frame value are differentially decoding.

7 9. A method of compensating for a phase shift in a
8 modem comprising:

9 attributing a sign to a frame of constellation points;

10 differentially encoding the frame and the sign; and

11 differentially decoding the frame and the sign.

1 10. The method of Claim 9, wherein the sign is set to
2 zero if $R_0 \leq N/2$ and the sign is set to one if $R_0 > N/2$, where
3 R_0 is the frame value and N is the product of the moduli.

1 11. The method of Claim 9, wherein the sign is set to
2 zero if $R_0 < N/2$ and the sign is set to one if $R_0 \Rightarrow N/2$, where
3 R_0 is the frame value and N is the product of the moduli.

1 12. The method of Claim 9, wherein the differential
2 decoding is performed after a multiple modulus decoder.

1 13. The method of Claim 9, the frame is differentially
2 encoded before being supplied to a multiple modulus encoder.

1 14. A method of compensating for a phase shift in a
2 modem comprising:

3 differentially encoding the frame; and

4 differentially decoding the frame.

1 15. The method of Claim 14, wherein the differential
2 decoding is performed after a multiple modulus decoder.

1 16. The method of Claim 14, the frame is differentially
2 encoded before being supplied to a multiple modulus encoder.

ABSTRACT

A differential encoder is designed to correct for any phase invariance. Without differential encoding defined for the V.92 upstream, undetectable errors are possible in a modem due to an inversion in the upstream channel. Immunity to channel inversions is provided by differentially encoding a combined precoding and modulus conversion system. A frame of a constellations is attributed a sign and the frame and the sign are differentially encoded. The frame and the sign are differentially decoded after the multiple modulus decoder, ensuring phase shift immunity.

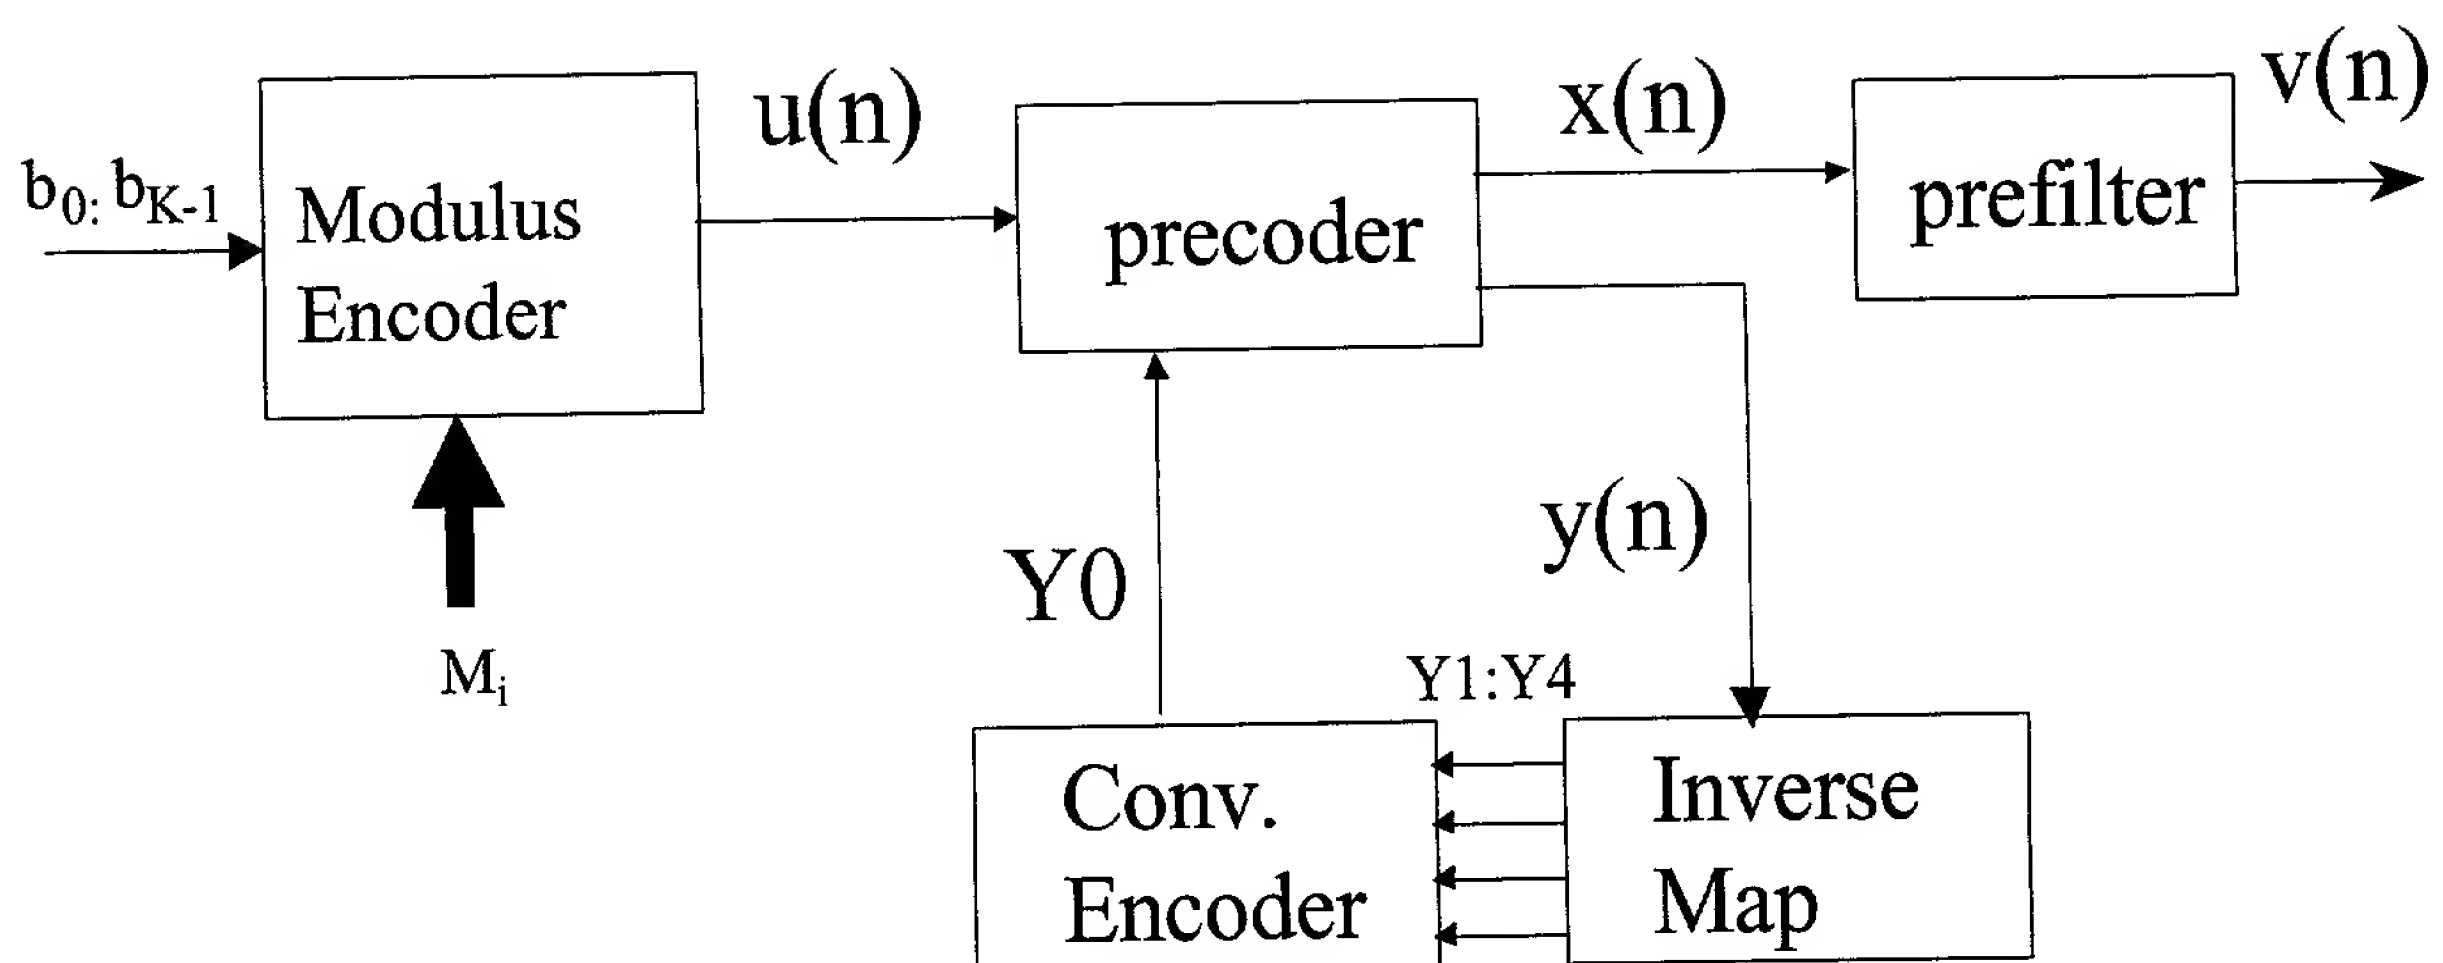


Figure 1

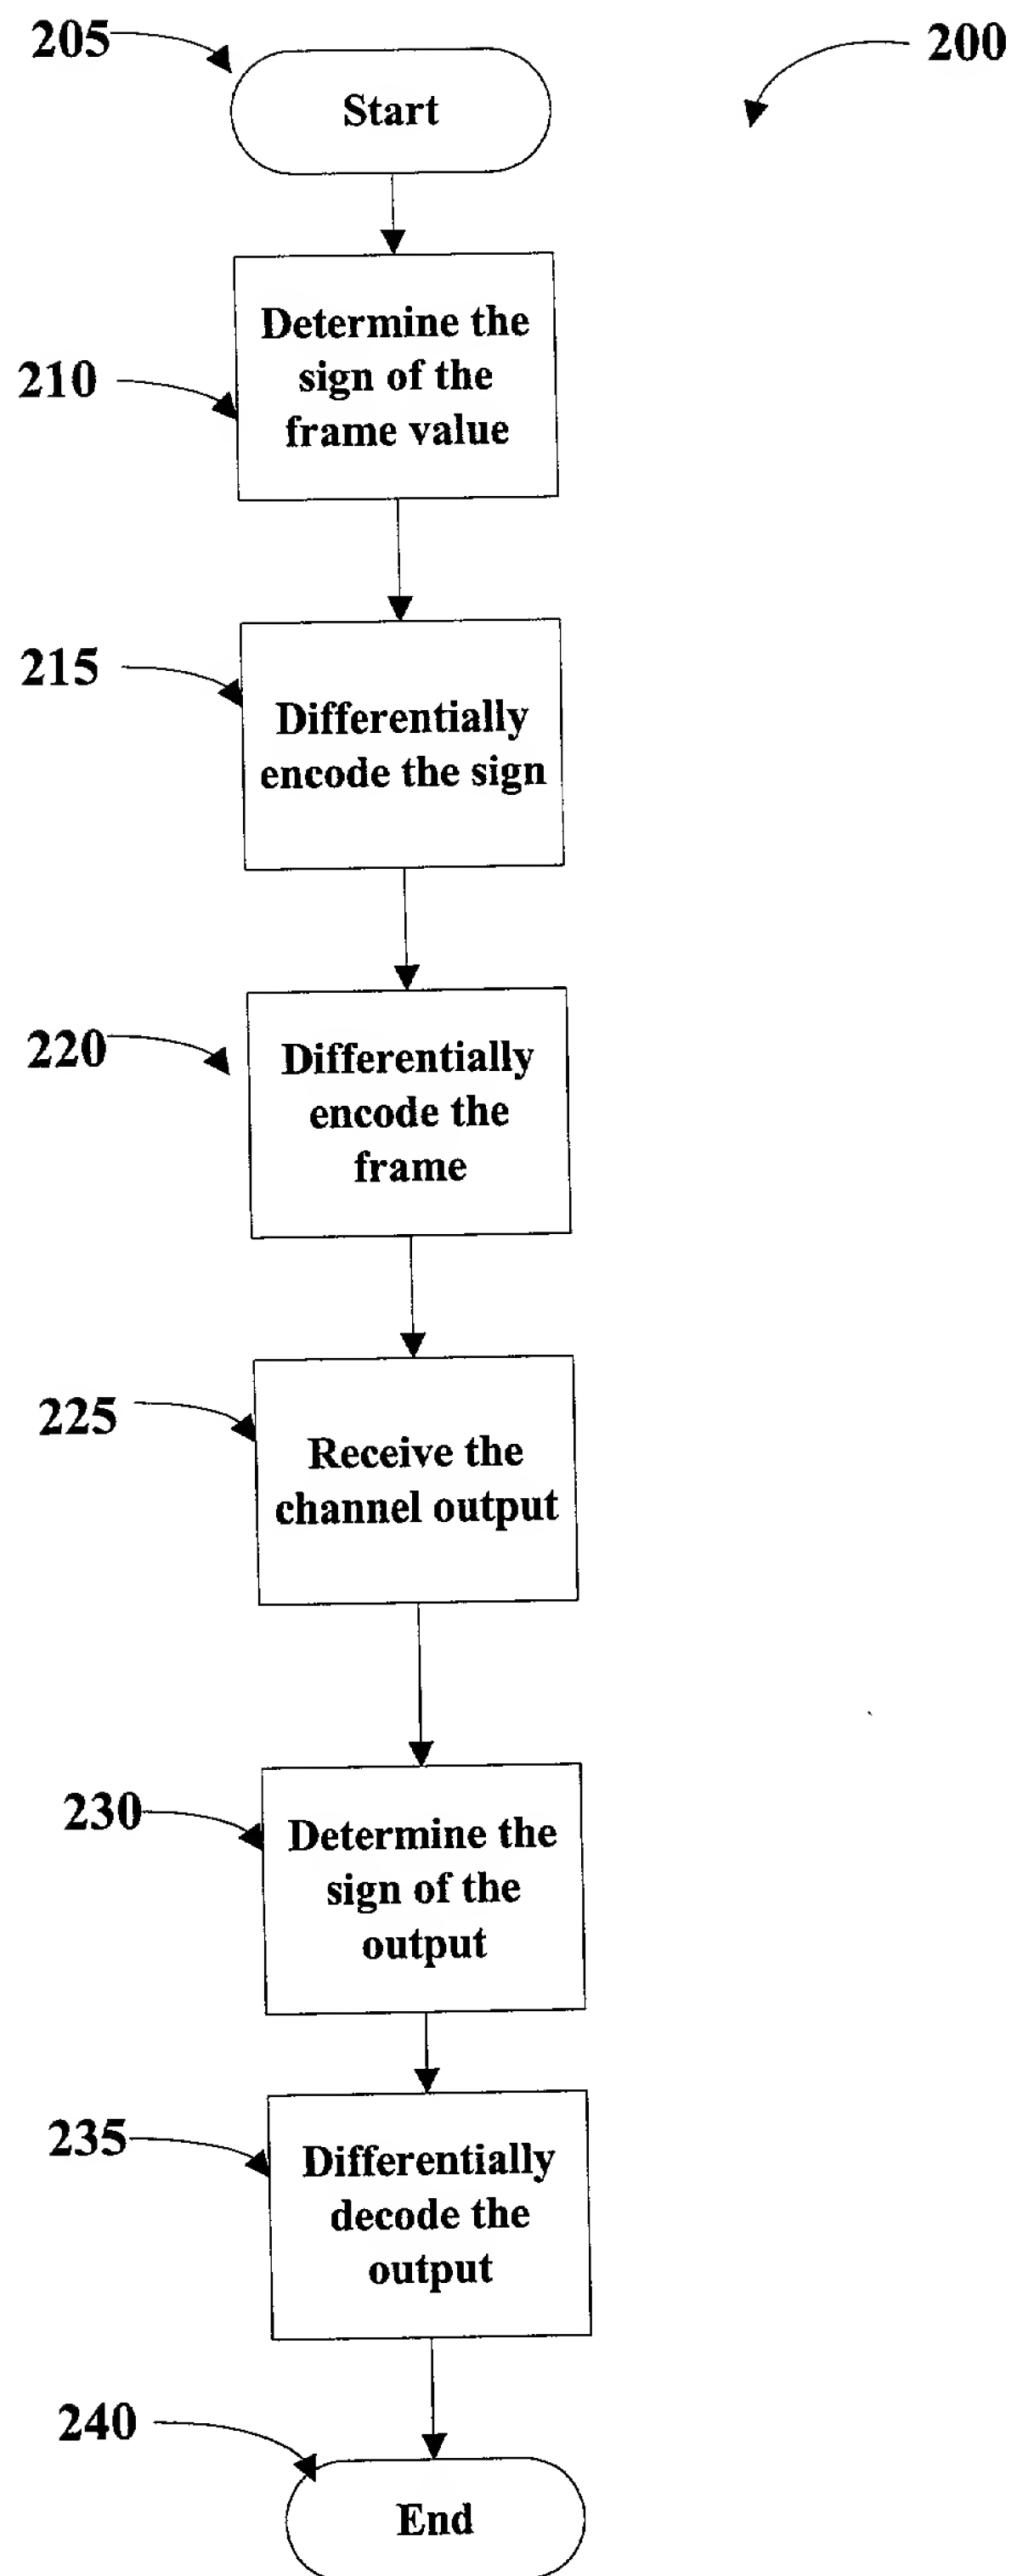


Figure 2